

SUPERGROUT

Cement based tile grout for wall and floor tiling grouting with joint width of 1 - 8 mm

DESCRIPTION:

- Super Grout is a cementitious single component tile grout. It is designed for grouting porous and vitreous tiles on interior or exterior walls and floors with joint width less than 8 mm.
- Super Grout has low water absorption and high adhesion to tiles and tile adhesive. It has wide range of colour to match different tiles.

USES:

- Grouting for ceramic, vitrified and marble that less than 8 mm joint
- Grouting for industrial flooring where resistance to chemical is not required.

FEATURES AND BENEFITS:

- To be applied indoors and outdoors.
- High hardness.
- Intense color.
- Easy to clean Very fine texture.
- Low water absorption.
- Resistant to cracking.
- Good abrasion resistance
- Good compressive and flexural strength

SURFACE PREPARATION:

- Substrate must be free from grease, mould oil, rust, rusty metal, wood peels, paints, plastics, loose particles, contamination on any traces of foreign materials affecting the adhesion of Super Grout.
- Ensure that the tile adhesive has fully set before grouting. With impervious or low porosity surfaces leave at least 3 days.
- Clean out any loose debris from the joints and ensure that they are clean and dry before grouting.
- Do not grout at temperatures less than 5°C or in damp conditions.
- Dampen the joints with clean water before applying the grout.

MIXING:


- Mix the dry mix powder with an electric mixer of 20 kg/bag with appropriate amount of water. For Super Grout add approximately 33– 36 % (6.6 – 7.2 L) of water.
- Stir the mixture thoroughly for 5 – 7 minutes to a creamy paste without lumps by using common portable electric mixer.
- Then let the mixture stand for 10 minutes for the additives to dissolve, and then mix again before use.

APPLICATION:

- 1- Before application, dampen the surface with clean water and allow excess water to drain away.
- 2- Always check a tile before grouting to ensure staining does not occur.
- 3- Work in small areas. Completely fill the joints with the aid of a rubber squeegee or grout float and compact well. Excess grout should be removed as work proceeds.
- 4- Allow about 15-30 minutes for the grout to dry sufficiently before cleaning off excess with a damp sponge. Polish the tiles with a clean, dry cloth when the grout is sufficiently set.

SUPERGROUT

Super Grout

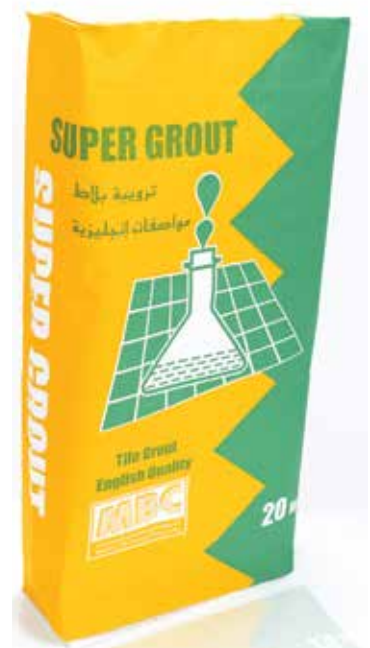

- 5- Tiles can be subject to normal conditions after 24 hours. When grouting external areas, protect from inclement weather and frost during and after application.
- 6- Swimming pools should not be filled for at least 3 weeks after completion of tiling.
- 7- Showers should not be used for at least 2 weeks after completion of tiling.

Coverage

- Varies according to tile size and joint width:

Tile Size (cm)	Joint Width	Requirement (kg)
2.5 x 2.5 x 0.625	3.125 mm	6.8
10.5 x 10.5 x 0.8	4 mm	2.8
150 x 150 x 6mm	2 mm	0.21
250 x 200 x 7.5mm	3 mm	0.26

COLORS

- Available in standard White & Grey.
- Additional colors available upon request.

CLEAN UP INSTRUCTIONS:

- Clean up tools and equipment with water

PRECAUTIONS:

- Do not apply below 5°C nor above 30°C.
- Do not apply when there is a risk of frost, rain, strong wind or direct sunlight.
- Do not use in expansion joints or joints subject to structural movements.
- Grout the joints once the floor or cladding is completely dry

PACKAGING:

10 & 20Kg bags

SHELF LIFE / STORAGE:

- This product must be stored in unopened packaging, clear of the ground in cool dry conditions and protected from excessive draught. If stored correctly, as detailed above, the shelf life of this product is 12 months.

ENVIRONMENTAL & SAFETY PRECAUTIONS:

- Avoid exposure to SupergROUT dust that may cause eye, skin, and lung irritation.
- Use approved dust mask while mixing SupergROUT.
- In case of eye contact, flush with large amount of water and seek medical help.
- For a full MSDS on this product, contact to MBC.